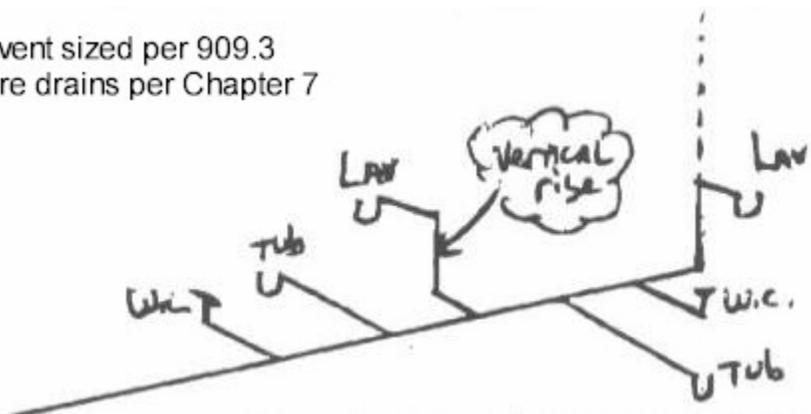


QUESTION:

When using a wet vent system for back to back bathroom groups, do both lavatories require a dry vent connection?

Wet vent sized per 909.3
Fixture drains per Chapter 7

**REVISED QUESTION:**

In reference to a **Wet vent system** installed per OPC section 909.

If two lavatories are included in the wet vent system, do both of them need to be physically vented to be considered a proper wet vent? Or in other words, can one of the lavatories **not** be physically vented and still be considered a proper wet vented fixture in accordance with OPC section 909?

OPINION:

“By consensus, it is the opinion of this committee, that this installation would not be considered a proper wet vent. If sized per chapter 7 as noted on the drawing, the down stream lav would have to be vented.”

Final Vote 8/4

This opinion is not meant to be a binding code interpretation.